

MF 423-4-2D

SERIES




Features

- Chassis Mount/Panel 3 Phase Filter 4 Wire
- Three Wire + Neutral
- General Purpose
- Compact
- Superior Performance
- Shock Proof Terminals
- Low Leakage Current

Technical Specification

- Maximum Operating Voltage: 440/520*/600* VAC
- Operating Frequency: 50/60Hz
- Rated Current: 6A to 250A
- High Potential test voltage: L to G 2120VAC FOR 250V
L to L 1414VDC FOR 250V
- Overload Capability: 6 x Rated current for 8sec
- Temperature Range :-25 °C to 85 °c
- Earth Leakage Current : 1 mA max
(Also available in low leakage Current)

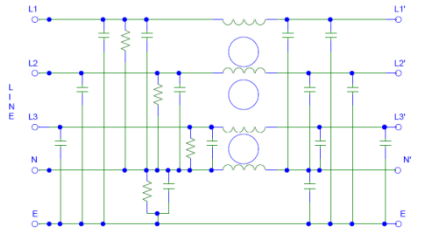

Application

- For UPS, Special purpose machines.
- Elevators
- CNC Machines
- HVAC
- Drives
- AC/DC Drives
- SCR Drives

Presentation

Aluminium

Mounting

Screw Mount or Panel Mount


Termination

Shock Proof Terminals/ Nut & Bolt

How to Order

Part No	Rated Current	Case	Termination
423-4-2D-06	6A	R2	Shock Proof Connector
423-4-2D-10	10A	R2	Shock Proof Connector
423-4-2D-16	16A	R3	Shock Proof Connector
423-4-2D-25	25A	R3	Shock Proof Connector
423-4-2D-36	36A	R3	Shock Proof Connector
423-4-2D-50	50A	R3	Shock Proof Connector
423-4-2D-60	60A	R4	Shock Proof Connector
423-4-2D-75	75A	R4	Shock Proof Connector
423-4-2D-100	100A	R4	Shock Proof Connector
423-4-2D-125	125A	R4	Shock Proof Connector
423-4-2D-150	150A	R4	Shock Proof Connector
423-4-2D-200	200A	R6	Nut & Bolt
423-4-2D-250	250A	R6	Nut & Bolt

Insertion Loss

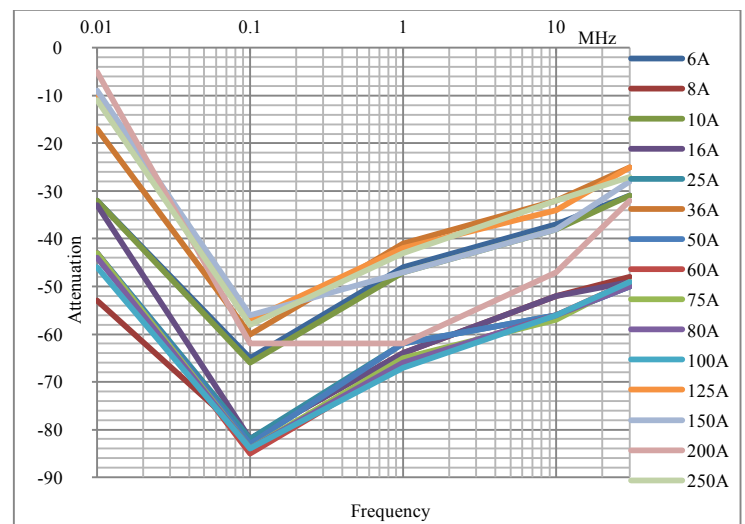

** For Customised filter Contact our sales department