

# MF 423-4-3D-BB SERIES




## Features

- Chassis Mount/Panel 3 Phase Filter 4 Wire
- Three Phase + Neutral
- General Purpose
- High Current Rating
- Compact
- Excellent Performance
- Bus Bar Termination

## Technical Specification

- Maximum Operating Voltage: 440/520\*/600\* VAC
- Operating Frequency: 50/60Hz
- Rated Current: 300A to 2500A
- High Potential test voltage:  
L to G 2120VAC FOR 250V  
L to L 1414VDC FOR 250V
- Overload Capability: 6 x Rated current for 8sec
- Temperature Range : -25 °C to 85 °c
- Earth Leakage Current : 1 mA max  
(Also available in low leakage Current)

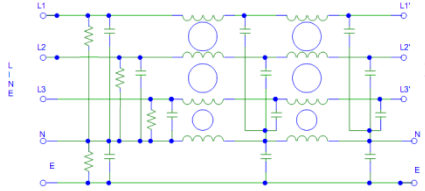

## Application

- For UPS, Special purpose machines.
- Elevators
- CNC Machines
- HVAC
- Drives
- AC/DC Drives
- SCR Drives

## Presentation

Aluminium/ CRCA with Nickel Plating

## Mounting

Panel/Chassis Mount

## Termination

Bus Bar

## How to Order

Part Number	Current Rating (A)	Case	Termination
MF 423-4-3D BB – 300A	300		Bus Bar
MF 423-4-3D BB – 400A	400		Bus Bar
MF 423-4-3D BB – 600A	600		Bus Bar
MF 423-4-3D BB – 800A	800		Bus Bar
MF 423-4-3D BB – 1000A	1000		Bus Bar
MF 423-4-3D BB – 1500A*	1500		Bus Bar
MF 423-4-3D BB – 2000A*	2000		Bus Bar
MF 423-4-3D BB – 2500A*	2500		Bus Bar

\*Not covered under CSA / C-US/NEMKO

\*\* For Customised filter Contact our sales department

## Insertion Loss

