

MF 423 4W SERIES




Features

- Chassis Mounting 3 Phase Filter 4 Wire
- General Purpose
- Compact
- Superior Performance

Technical Specification

- Maximum Operating Voltage: 440 VAC
- Operating Frequency: 50/60Hz
- Rated Current: 1A to 150A
- High Potential test voltage:
L to G 2120VAC FOR 250V
L to L 1414VDC FOR 250V
- Overload Capability: 6 x Rated current for 8sec
- Temperature Range :-25 °C to 85 °C
- Earth Leakage Current : 1 mA max
(Also available in low leakage Current)

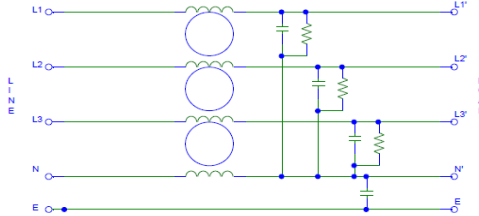

Application

- For UPS, Special purpose machines.
- Elevators
- CNC Machines
- Drives
- AC/DC Drives
- SCR Drives
- Rectifier
- Convertors
- Inverters

Presentation

Nickel Plated Steel/Aluminium

Mounting

Screw Mount or Panel Mount

Termination

Fastons or Cable or Screw

How to Order

Part No	Rated Current	Case	Termination
MF423-01-H	1	H4	Fastons/Cable
MF423-03-H	3	H4	Fastons/Cable
MF423-06-H	6	H4	Fastons/Cable
MF423-10-H	10	H4	Fastons/Cable
MF423-15-K	15	K4	M5Screw/Cable
MF423-20-K	20	K4	M5Screw/Cable
MF423-30-K	30	K4	M5Screw/Cable
MF423-40-K	40	K4	M5Screw/Cable
MF423-50-SX	50	SX4	M6Screw/Cable
MF423-60-SX	60	SX4	M6Screw/Cable
MF423-80-R4	80	R4	M8Screw/Cable
MF423-100-R4	100*	R4	M10Screw/Cable
MF423-150-R4	150*	R4	M10Screw/Cable

*Not covered under CSA / C-US/NEMKO

** For Customised filter Contact our sales department

Insertion Loss

