

MF 420 SERIES



Features

- Superior performance
- Rated currents up to 100 A
- Medical versions available
- High conducted attenuation performance
- Screw Mount

Application

- Power systems
- Electronic equipment
- Frequency convertors
- Stepper motors drives
- Ups
- Inverters

Technical Specification

- Maximum Operating Voltage: 250 VAC
- Operating Frequency: 50/60Hz
- Rated Current: 1A to 100A
- High Potential test voltage:
L to G 2120VDC FOR 250V
L to L 1414VDC FOR 250V
- Overload Capability: 6 x Rated current for 8sec
- Temperature Range : -25 °C to 85 °c
- Earth Leakage Current : 1 mA max
(Also available in low leakage Current)

Presentation

Nickel Plated metal case/ Aluminium

Mounting

Screw Mount or Panel Mount


Termination

Fastons or Cable or Screw

How to Order

Part No.	Current Rating (Amps)	Case	Termination
MF 420	1A	A	Fastons/Cable
MF 420	2A	M	Fastons/Cable
MF 420	3A	A	Fastons/Cable
MF 420	6A	A	Fastons/Cable
MF 420	10A	A	Fastons/Cable
MF 420	16A	E	Fastons/Cable
MF 420	20A	H	Fastons/Cable
MF 420	25A	K	M5Screw/Cable
MF 420	30A	K	M5Screw/Cable
MF 420	35A	K	M5Screw/Cable
MF 420	50A	SX	M6Screw/Cable
MF 420	60A*	SX	M6Screw/Cable
MF 420	75A*	PX	M10Screw/Cable
MF 420	100A*	PX	M10Screw/Cable

Insertion Loss

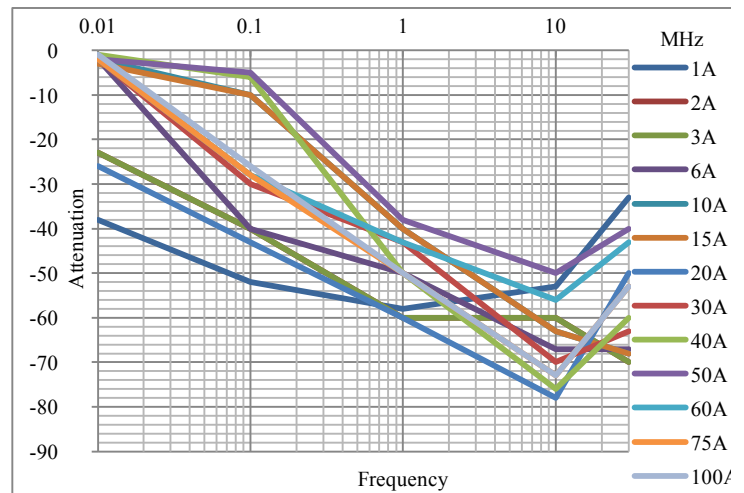

*Not covered under CSA/C-US/NEMKO

** For Customised filter Contact our sales department